


## 8" inch Embedded Touch Monitor

### Products application :


- POS Terminal
- Industrial PC
- Kiosk
- Gaming
- Medical apparatus
- Personal computer
- Mobile GPS
- Office automation
- Security system of the house
- Car-mounted amusement
- Military equipment
- Communicate

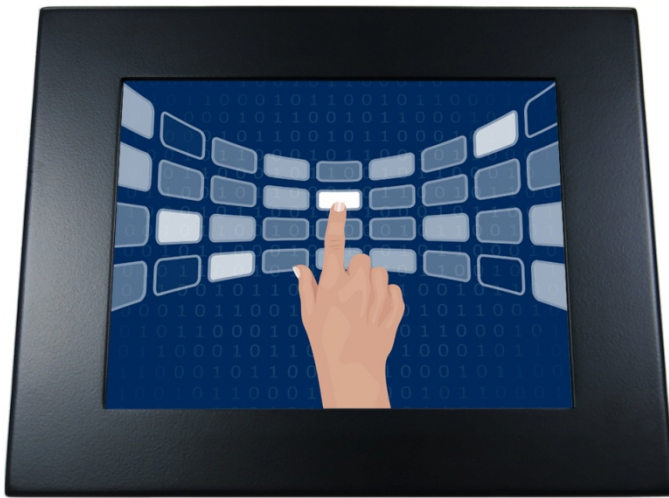

## 8" inch Embedded Touch Monitor

### Display Specifications :

Active Area	162 × 121 mm
Pixel Pitch	0.05275(W) × 0.15825(H)mm
Brightness	300 cd/m <sup>2</sup>
Contrast Ratio	700 : 1
Resolution	1024 x 768 ( XGA )
Viewing Angle	L/R 150° ; U/D150°
Response Time	10 ms ( Tr + Tf )
Display Colors	262K
Display Modes	640×480 ; 800×600 ; 1024×768
Signal input	15 Pin D_Sub ; Mini-Audio
Audio	1W ( 8Ω ) ×1
OSD Keyboard	⊙Menu/Select ⊖ ⊕ ⊙Auto/Exit ⊙Power
Power Source	DC 12V ; ≤7w ; Standby ≤1w
Power Consumption	
Storage · Operation	-20~60°C ; -10~50°C
VESA	75×75 mm
Casing Colors	Black
Casing Size · Weight	230 × 183 × 41 mm ; 1.2 kg ( W×H×D )
Carton · gross weight	315 × 150 × 295 mm ; 2.34 kg ( W×H×D )

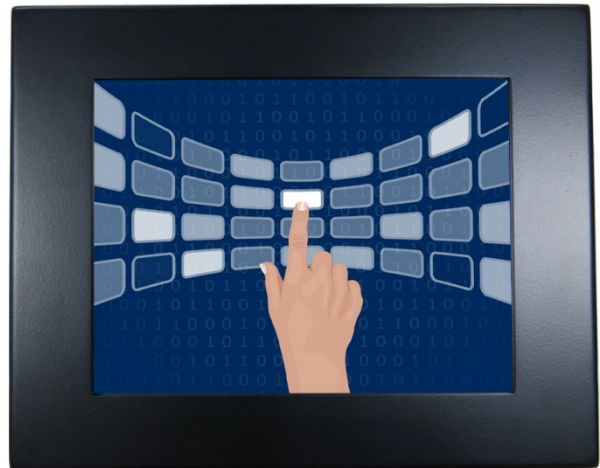

### Touch Feature :

Input Method	Finger, gloved hand, or stylus activation
Activation Force	≥ 50g
Linearity	≤ 1.5%
Surface	≥ 3H
Life Time	≥ 35,000,000
Application	Writing and Signature Capture Capability
PC Link	USB or RS232

### Software Feature :

Calibration	Fast full oriental 4 points position
Compensation	Edge compensation. Accuracy 25 points linearity compensation
Draw Test	Position and linearity verification
Controller	Support multiple controllers
Languages	English · Simple Chinese · Traditional Chinese · Japanese · French · German · Spanish · Korean · Arabic · Czech · Danish · Dutch · Greek · Hungarian · Italian · Norwegian · Russian · Polish · Portuguese · Slovenian · Swedish · Thai · Turkish
Mouse Emulator	Right / left button emulation. Auto Right / left Click ( PDA function )
Touch Style	Drawing a Mode · button a Mode · Touch Off/ on Switch
Double Click	Configurable double click speed · Configurable double click area
Sound Modes	No sound · Touch down · Touch up
COM Port Support	COM1 ~ COM255 for Windows and Linux COM1 ~ COM8 for MS- DOS
Display Support	display rotation · Support multiple monitors
Support O.S	All Windows-32 bit O.S Windows7-8-10 ; XP-64 bit O.S MS-DOS ; A II Linux ; MAC

### Order information :

AIM-PM5R080-R21 : 【VGA/AUDIO/USB-TOUCH】

AIM-PM5R080-R22 : 【VGA/AUDIO/RS232-TOUCH】



Accessory VGA Cable/AC90~260V Adapter/Power Cable/USB or RS232 Cable/Audio Cable/  
Touch Pen/Cleaning wipes/Driver Disk



**3 Year Warranty**  
LCD Panel 1 Year



Dimensions :

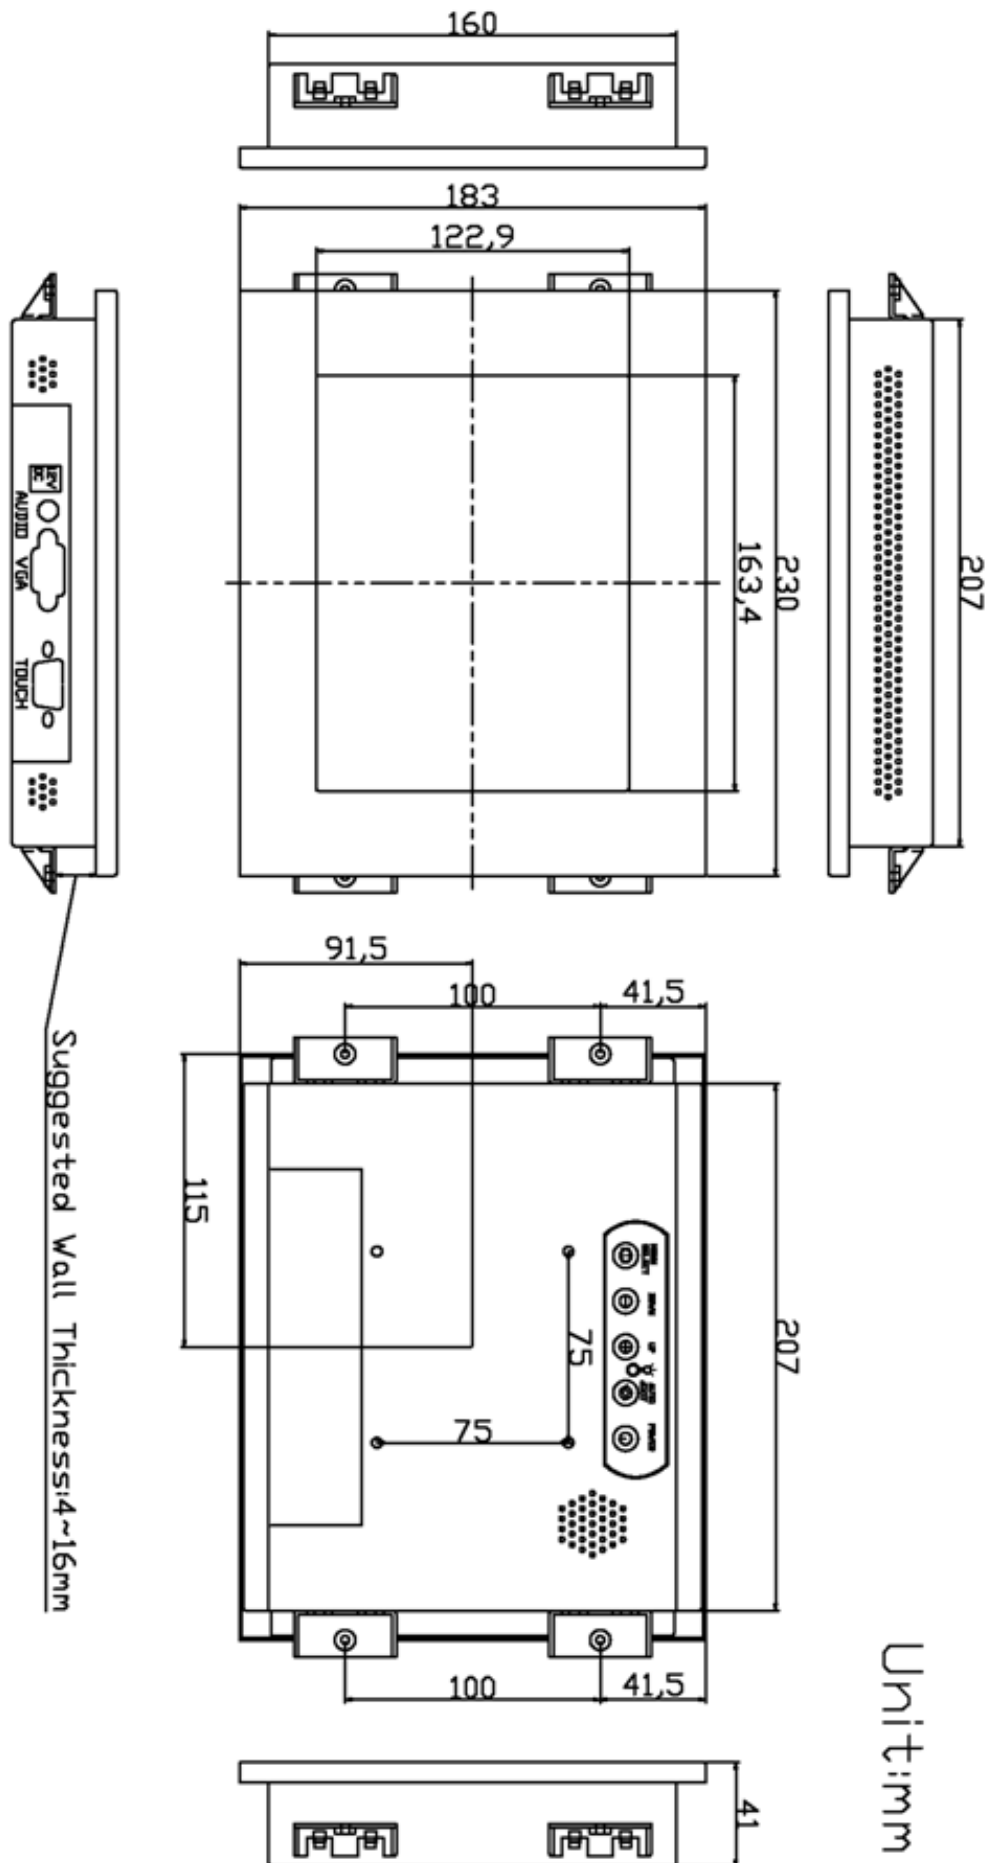

NOTE  
ALL DIMENSIONS ARE IN MILL METERS