




15.6" inch Embedded Touch Monitor (Projected Capacitive Multi-Touch)

Products application :

- POS Terminal
- Industrial PC
- Kiosk
- Gaming
- Medical apparatus
- Personal computer
- Mobile GPS
- Office automation
- Security system of the house
- Car-mounted amusement
- Military equipment
- Communicate



15.6" inch Embedded Touch Monitor (Projected Capacitive Multi-Touch)

Display Specifications :

| | |
|---------------------|---|
| Active Area | 344 × 193 mm |
| Pixel Pitch | 0.17925 × 0.17925 mm |
| Brightness | 220 cd/m ² |
| Contrast Ratio | 800 : 1 |
| Resolution | 1920 × 1080 (Full HD) |
| Viewing Angle | L/R 170° ; U/D 170° |
| Response Time | 25 ms (Tr + Tf) |
| Display Colors | 262K |
| Display Modes | 640×480 ; 800×600 ; 1024×768 ; 1280×720 ; 1280×1024 ; 1360×768 ; 1440×900 ; 1680×1050 ; 1920×1080 |
| Signal input | VGA ; DVI ; Audio |
| Mini-Audio out | 1W (8Ω) × 2 |
| OSD Keyboard | ⊙ Menu/Select ⊙ - ⊙ + ⊙ Power |
| Power Source | DC 12V ; ≤9.5w ; Standby ≤1w |
| Power Consumption | |
| Storage Operation | -20~60°C ; 0~50°C |
| VESA | 75×75 mm |
| Casing Colors | Black |
| Casing Size Weight | 395 × 260 × 47 mm ; 2.6 kg (W×H×D) |
| Carton gross weight | 550 × 400 × 180 mm ; 4.25 kg (W×H×D) |



Touch Feature :

| | |
|--------------|--|
| Input Method | Capacitive stylus, Finger |
| Linearity | ≤2.5mm |
| Surface | ≥7H |
| Life Time | Unlimited |
| Application | Writing and Signature Capture Capability |
| PC Link | USB or RS232(Single-Touch) |

Software Feature :



| | |
|-------------------|---|
| Draw Test | Position and linearity verification |
| Controller | Support multiple controllers |
| Languages | English · Simple Chinese · Traditional Chinese · Japanese · French · German · Spanish · Korean · Arabic · Czech · Danish · Dutch · Greek · Hungarian · Italian · Norwegian · Russian · Polish · Portuguese · Slovenian · Swedish · Thai · Turkish |
| Mouse Emulator | Right / left button emulation. Auto Right / left Click (PDA function) |
| Touch Style | Drawing a Mode · button a Mode · Touch Off/ on Switch |
| Double Click | Configurable double click speed · Configurable double click area |
| Sound Modes | No sound · Touch down · Touch up |
| Display Support | display rotation · Support multiple monitors |
| Division Pattern | Support two halves and four parts with touch function, you can also create your own division patterns. |
| Settings: | |
| Edge compensation | Support edge compensation and you can also add your own numbers for it. |
| Support O.S | All Windows-32 bit O.S Windows7-8-10 : XP-64 bit O.S Android : All Linux : MAC |



Order information :

| | | | |
|------------------------|--|------------------------|-----------------------------|
| AIM-TMOPPCTU156-T01W : | 【VGA/DVI/AUDIO/USB-TOUCH】 | AIM-TMOPPCTU156-T02W : | 【VGA/DVI/AUDIO/RS232-TOUCH】 |
| Accessory | VGA Cable/AC90~260V Adapter/Power Cable/Audio Cable/USB or RS232 Cable/Cleaning wipes/ Driver Disk ※DVI Cable(Optional) | | |



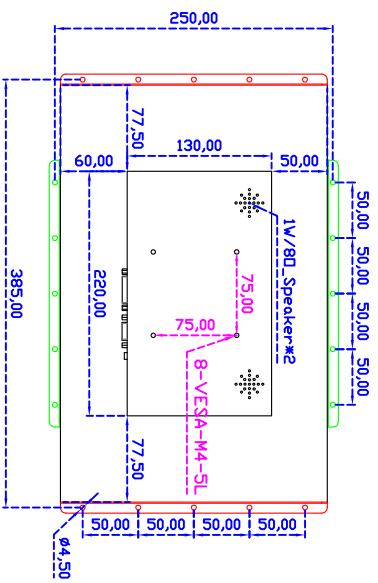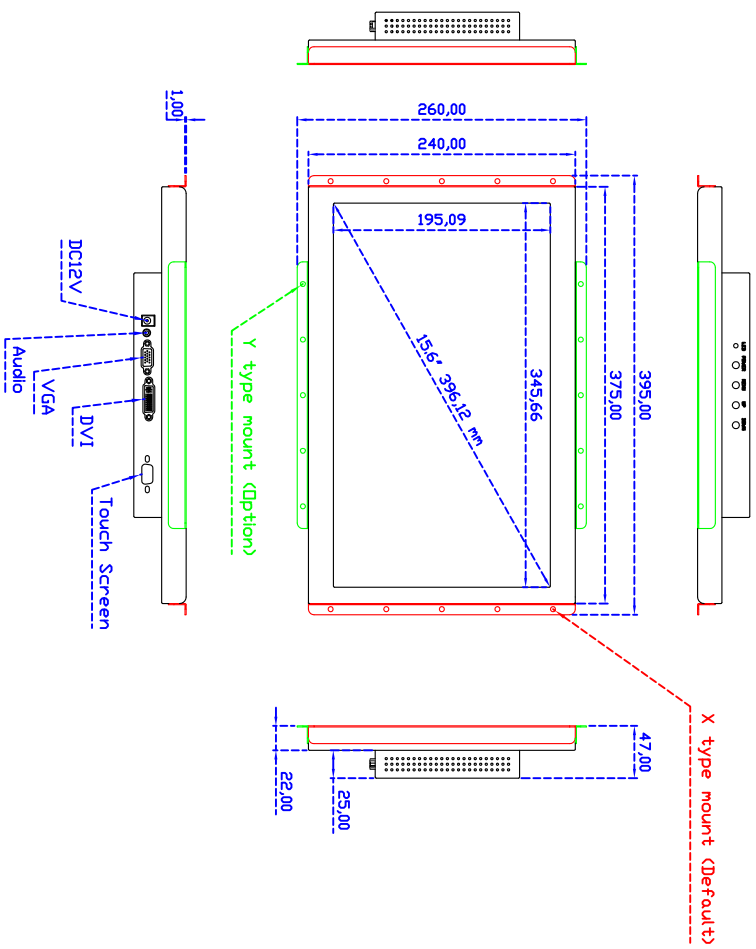

15,6" Embedded Touch Monitor.

AIM-TM0PXXXX156-T01W