
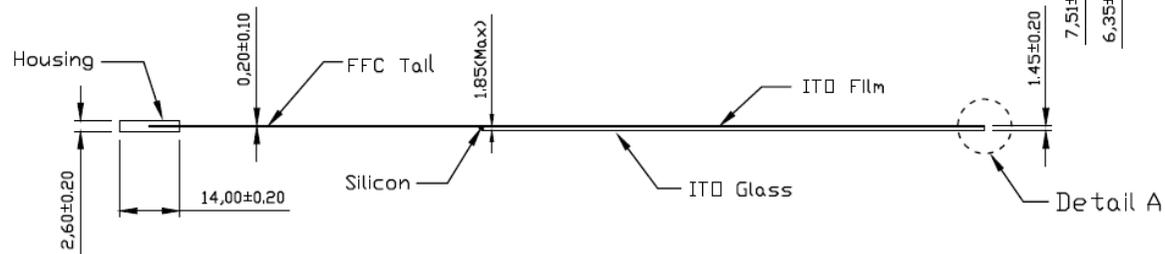


Connector Pinout	
Pin NO.	Designation
1	UR
2	LR
3	SG
4	UL
5	LL

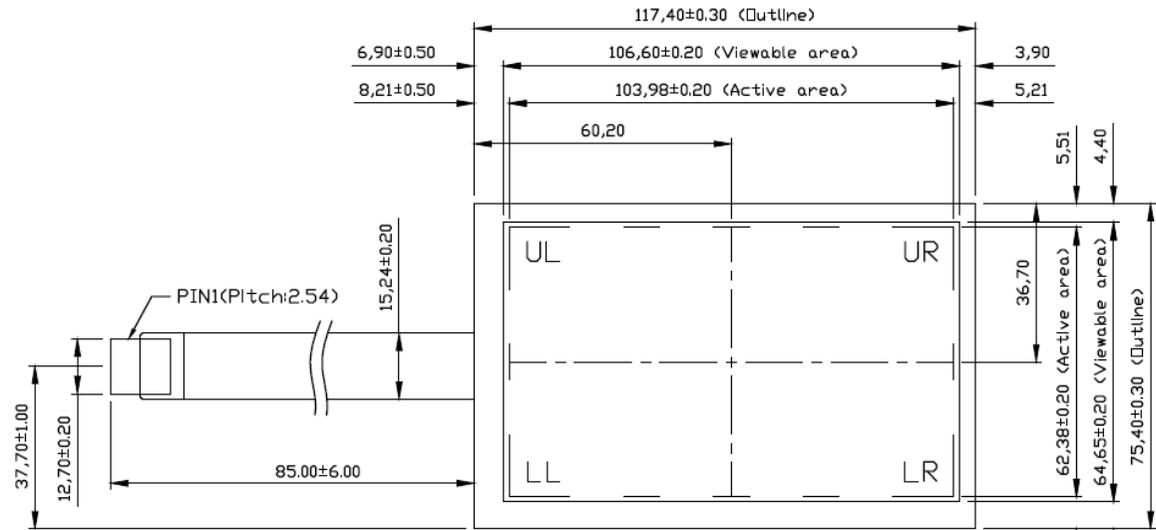

Detail A
 ITO Film 0.188mm
 Adhesive 0.06mm
 ITO Glass 1.1mm

NOTES:

1. Environmental Specifications:
 - 1.1 STORAGE TEMPERATURE:
-40°C ~ 85°C
Humidity Range: 20%RH~90%RH
(Non Condensing)
 - 1.2 OPERATION TEMPERATURE: -30°C ~ 85°C
Humidity Range: 20%RH~90%RH
(Non Condensing)
 - 1.3 The above environment is under normal pressure of the atmosphere
2. Optical Specifications:
 - 2.1 Transparency: 80±3%
 - 2.2 Haze: 5±3% (Clear)
3. Electrical Specifications
 - 3.1 Loop resistance X: 20Ω~500Ω, Y: 20Ω~500Ω
 - 3.2 Voltage endurance DC 50V/60sec.
 - 3.3 Linearity deviation X ≤ 1.5%, Y ≤ 1.5%
 - 3.4 Insulation resistance ≥ 20MΩ/25VDC

瞄準科技有限公司 AIM TOUCH TECHNOLOGY CO.,LTD.	DATE : 2013/08/09	Part Number	ITO Film Type	Glass Type	Glass Thickness	Finished Part Thickness
 WWW.AIMTOUCH.COM	MODEL :	AIM-5R-0477-M01-G1N	ANTI GLARE	high temperature strengthen	1.1mm	1.45mm±0.2
	AIM-5R-0477-M01	AIM-5R-0477-M01-G16N	ANTI GLARE	chemical strengthen	1.6mm	1.95mm±0.2
		AIM-5R-0477-M01-G2N	ANTI GLARE	high temperature strengthen	1.85mm	2.25mm±0.2

NOTE : All indications are the millimeters.