



- NOTE:
- 1.CABLE IS ATTACHED TO THE DOWN SIDE OF TOUCH PANEL AS SHOWN.
  - 2.FPC TAIL CONNECTOR:PITCH 1.00mm
  - 3.ITO FILM IS ANTI-GLARE AND ANTI-NEWTON RING TYPE.
  - 4.SURFACE HARDNESS 3H.
  - 5.PALM REJECTION.
  - 6.4 WIRE RESITIVE.
  - 7.W/O CONTROL BOARD.
  - 8.TRANSPARENCY 81%.
  - 9.FPC TAIL IS UP CONTACT.

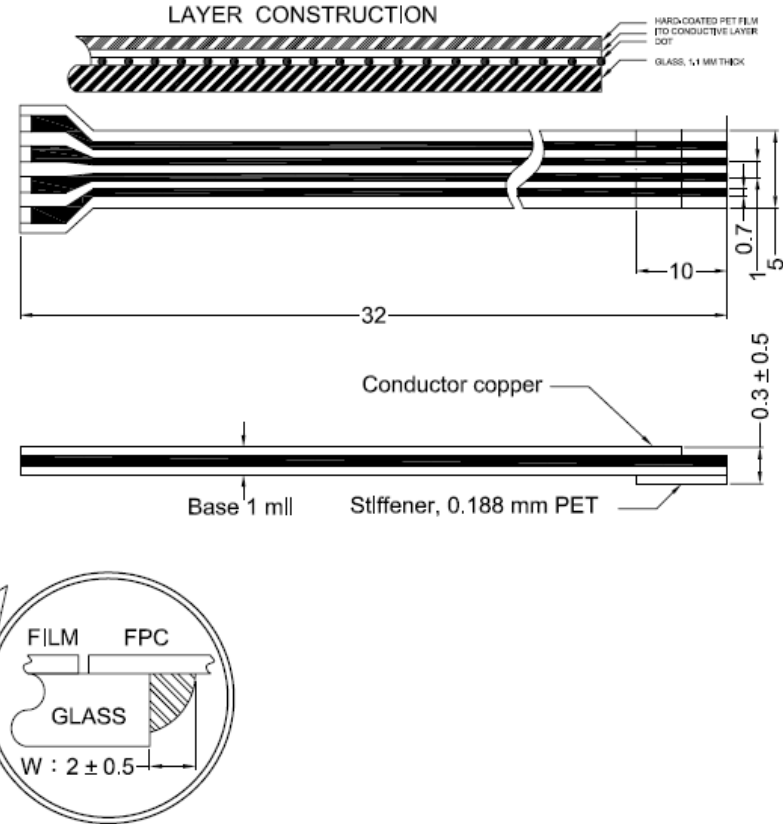

CONNECTOR PINOUT	
PIN NO	ASSIGNMENT
1	Y up
2	X right
3	Y down
4	X left

瞄準科技有限公司 AIM TOUCH TECHNOLOGY CO.,LTD.	DATE : 2010/01/04	Part Number	ITO Film Type	Glass Type	Glass Thickness	Finished Part Thickness
	MODEL :	AIM-4R-1010-A01-G0N	ANTI GLARE	General	0.7mm	1.0mm±0.2
 WWW.AIMTOUCH.COM	AIM-4R-1010-A01	AIM-4R-1010-A01-G1N	ANTI GLARE	General	1.1mm	1.4mm±0.2
		AIM-4R-1010-A01-G2N	ANTI GLARE	General	1.8mm	2.1mm±0.2

NOTE : All indications are the millimeters.