




Connector Pinout	
Pin NO.	Designation
1	UR
2	LR
3	SG
4	UL
5	LL

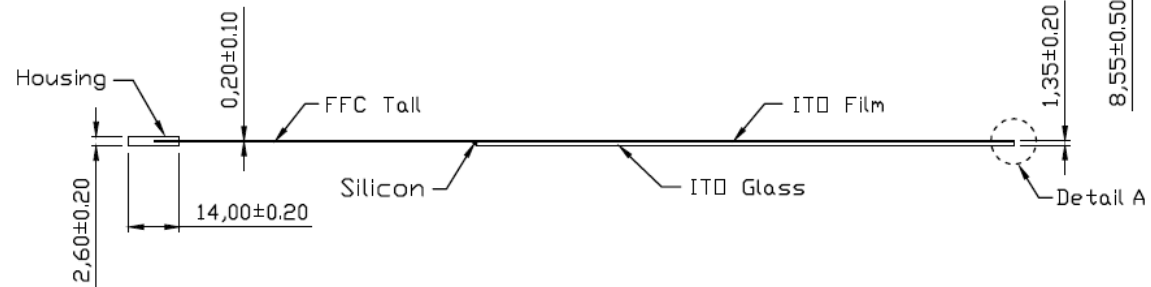


HOUSING

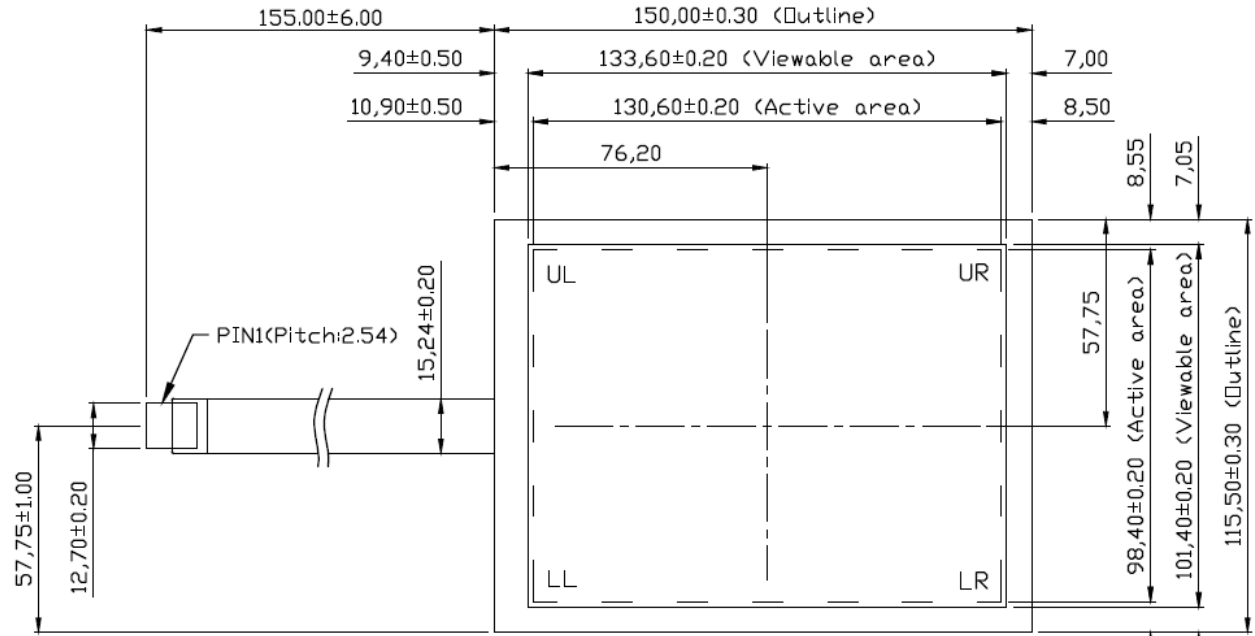

Detail A

NOTES:

- Optical Specifications:
 - Transparency: 80±3%
 - Haze: 10±3% (Anti Glare)
- Electrical Specifications:
 - Loop resistance X: 20Ω-500Ω, Y: 20Ω-500Ω
 - Voltage endurance DC 50V/60sec.
 - Linearity deviation X ≤ 1.5%, Y ≤ 1.5%
 - Insulation resistance ≥ 20MΩ/25VDC

瞄準科技有限公司 AIM TOUCH TECHNOLOGY CO.,LTD.	DATE : 2014/03/06	Part Number	ITO Film Type	Glass Type	Glass Thickness	Finished Part Thickness
 WWW.AIMTOUCH.COM	MODEL :	AIM-5R-0650-M01-G1N	ANTI GLARE	high temperature strengthen	1.1mm	1.35mm±0.2
	AIM-5R-0650-M01	AIM-5R-0650-M01-G16N	ANTI GLARE	chemical strengthen	1.6mm	1.9mm±0.2
	AIM-5R-0650-M01-G2N	ANTI GLARE	high temperature strengthen	1.85mm	2.25mm±0.2	

NOTE : All indications are the millimeters.