
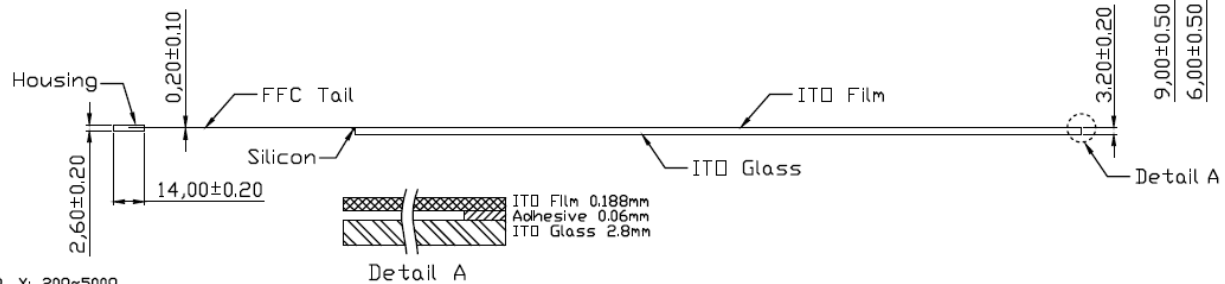
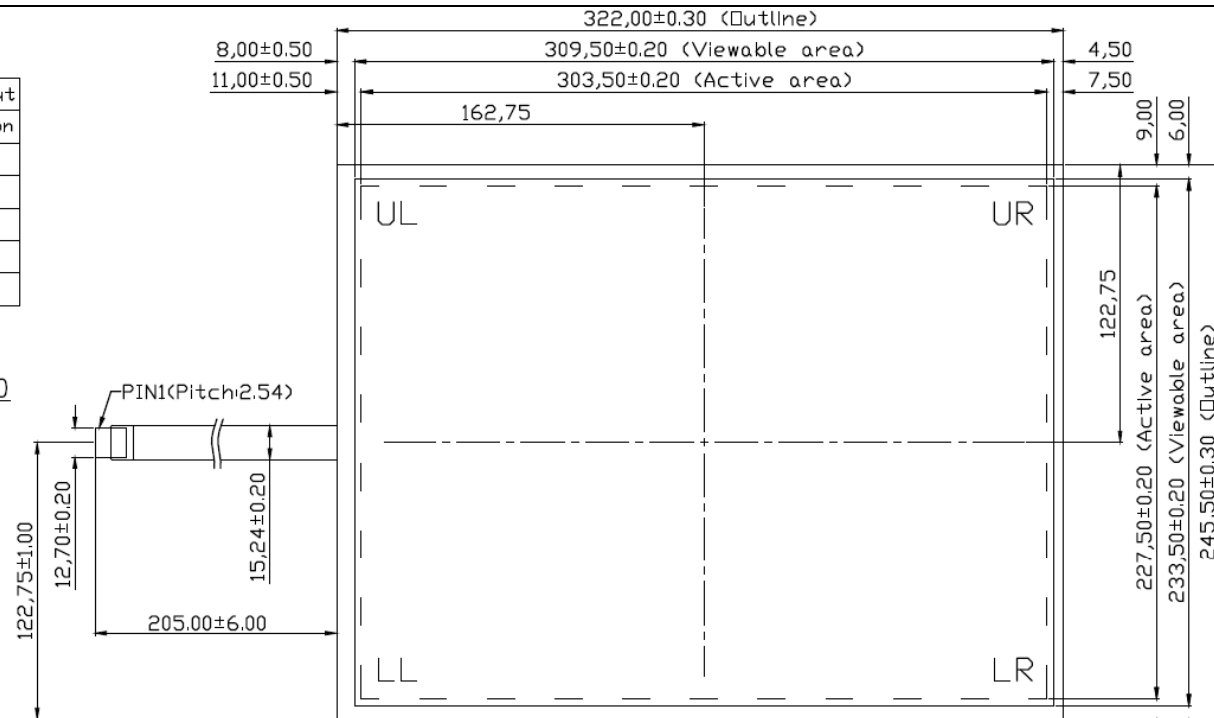



Pin NO.	Designation
1	UR
2	LR
3	SG
4	UL
5	LL



NOTES:

- Optical Specifications:
  - 1.1 Transparency: 79±3%
  - 1.2 Haze: 8±3% (Anti Glare)
- Electrical Specifications:
  - 2.1 Loop resistance X: 20Ω-500Ω, Y: 20Ω-500Ω
  - 2.2 Voltage endurance DC 50V/60sec.
  - 2.3 Linearity deviation X ≤ 1.5%, Y ≤ 1.5%
  - 2.4 Insulation resistance ≥ 20MΩ/25VDC
- Operational Force ≤ 50a (R0.8 Touch Pen)

瞄準科技有限公司 AIM TOUCH TECHNOLOGY CO.,LTD.	DATE : 2015/09/07	Part Number	ITO Film Type	Glass Type	Glass Thickness	Finished Part Thickness
 WWW.AIMTOUCH.COM	MODEL :	AIM-5R-1500-M04-G2N	ANTI GLARE	high temperature strengthen	1.85mm	2.2mm±0.2
	AIM-5R-1500-M04	AIM-5R-1500-M04-G25N	ANTI GLARE	chemical strengthen	2.5mm	2.8mm±0.2
	AIM-5R-1500-M04-G3N	ANTI GLARE	high temperature strengthen	2.8mm	3.2mm±0.2	

NOTE : All indications are the millimeters.