

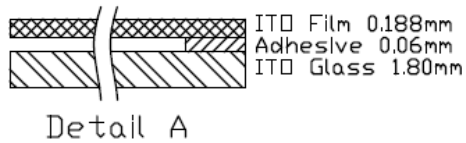



Connector Pinout	
Pin NO.	Designation
1	LR
2	LL
3	SG
4	UR
5	UL

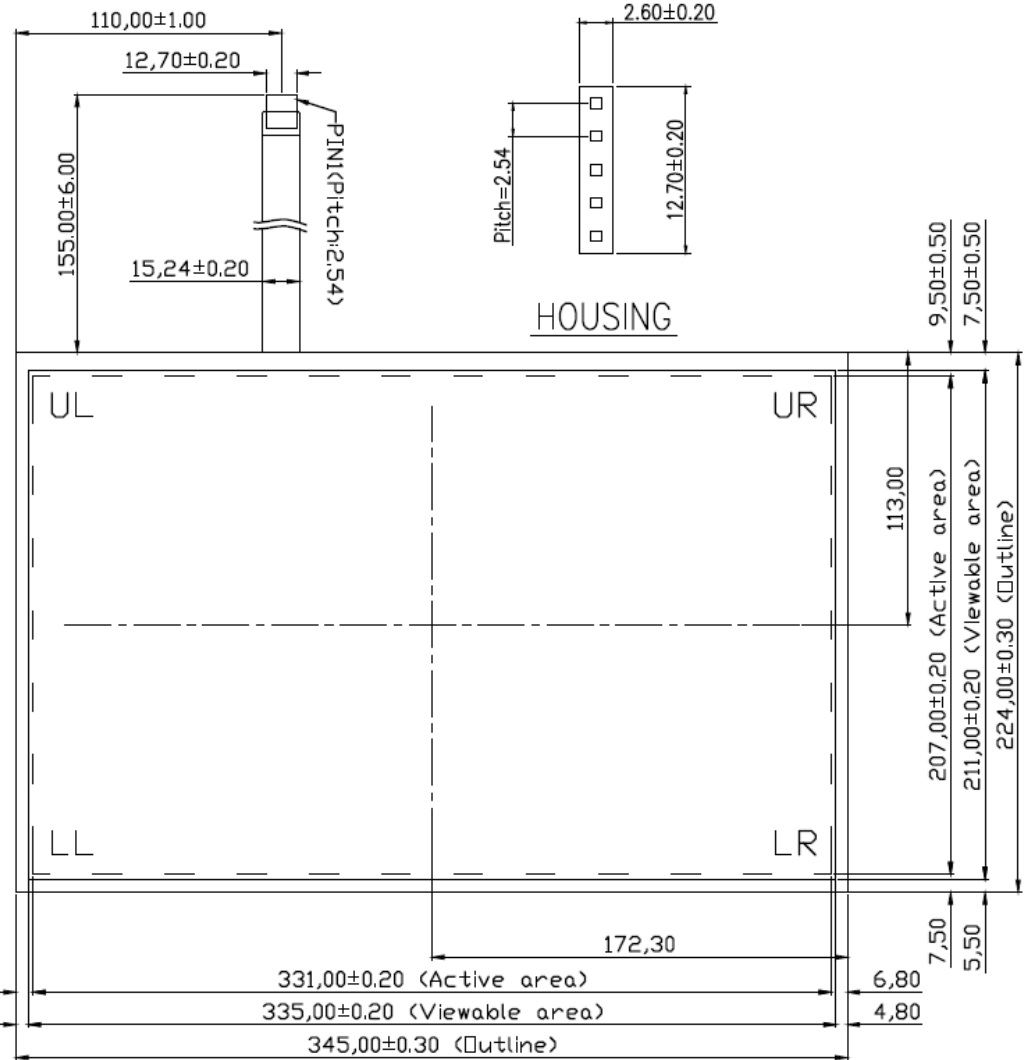

NOTES:

- Optical Specifications:
 - Transparence: 79±3%
 - Haze: 8±3% (Anti Glare)
- Electrical Specifications
 - Loop resistance X: 20Ω~500Ω, Y: 20Ω~500Ω
 - Voltage endurance DC 50V/60sec.
 - Linearity deviation X ≤ 1.5%, Y ≤ 1.5%
 - Insulation resistance ≥ 20MΩ/25VDC
- Operating Force ≤ 50g (R0.8 Touch Pen)

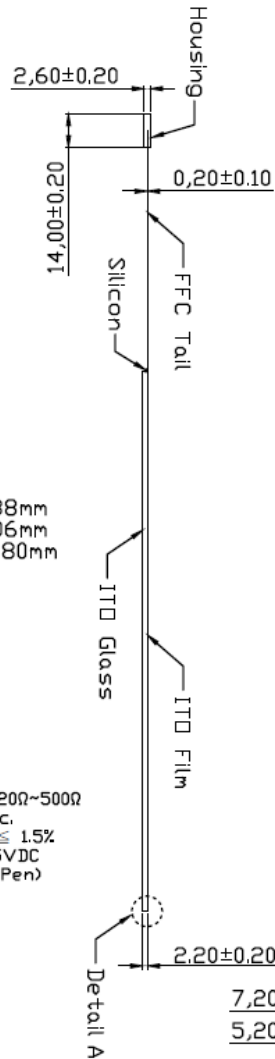

瞄準科技有限公司 AIM TOUCH TECHNOLOGY CO.,LTD.	DATE : 2015/10/30	Part Number	ITO Film Type	Glass Type	Glass Thickness	Finished Part Thickness
 WWW.AIMTOUCH.COM	MODEL :	AIM-5R-1540-M03-G2N	ANTI GLARE	high temperature strengthen	1.8mm	2.2mm±0.2
	AIM-5R-1560-M03	AIM-5R-1540-M03-G25N	ANTI GLARE	chemical strengthen	2.5mm	2.8mm±0.2
	AIM-5R-1540-M03-G3N	ANTI GLARE	high temperature strengthen	2.8mm	3.2mm±0.2	

NOTE : All indications are the millimeters.