



Connector Pinout	
Pin NO.	Designation
1	LR
2	LL
3	SG
4	UR
5	UL

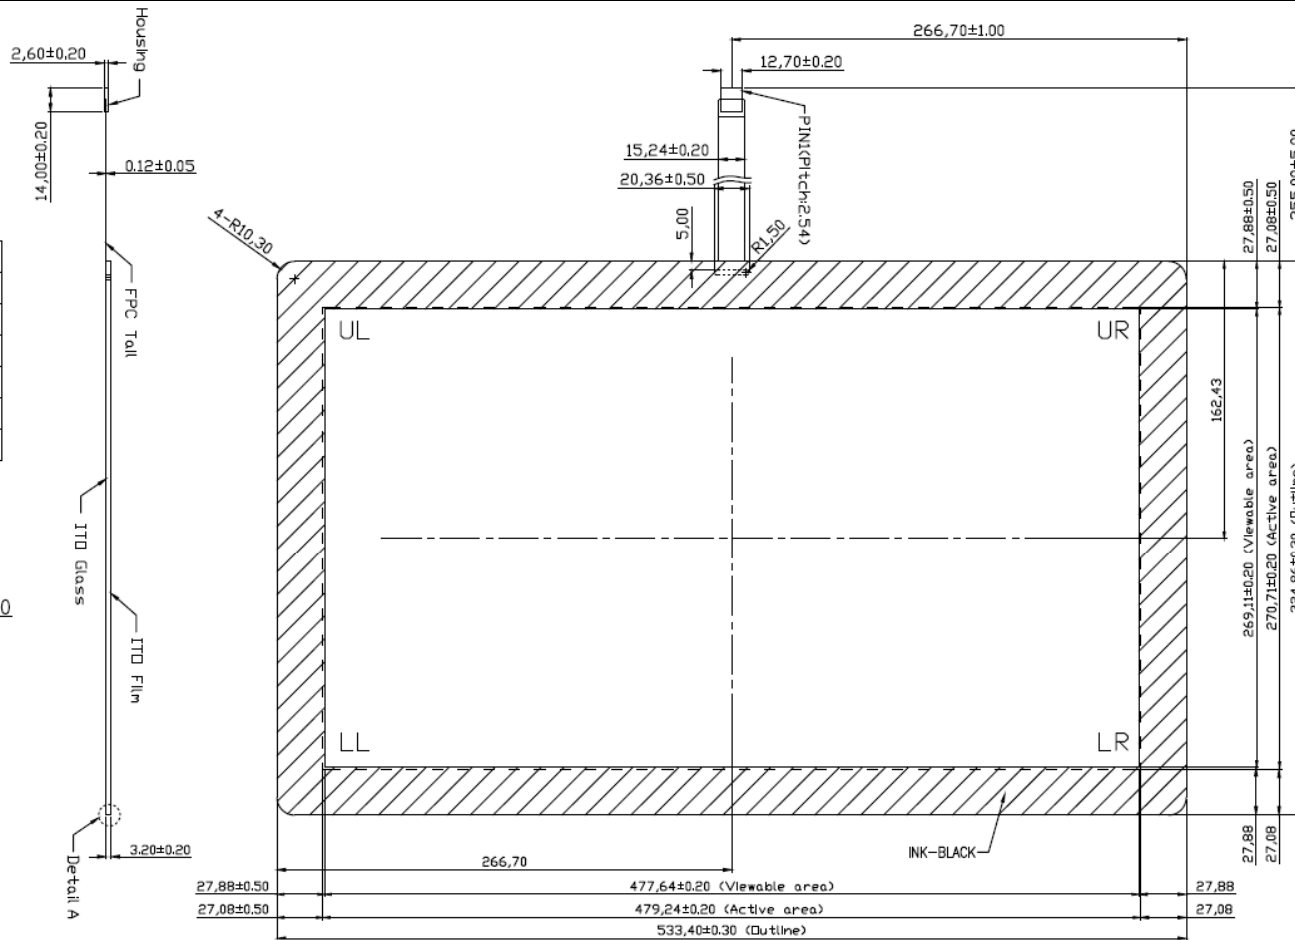

NOTES:


1. Optical Specifications
  - 1.1 Transparency: 79±3%
  - 1.2 Haze: 8±3% (Anti Glare)
2. Electrical Specifications
  - 2.1 Loop resistance  $X_i$  20Ω~500Ω,  $Y_i$  20Ω~500Ω
  - 2.2 Voltage endurance DC 50V/60sec.
  - 2.3 Linearity deviation  $X \leq 1.5\%$ ,  $Y \leq 1.5\%$
  - 2.4 Insulation resistance  $\geq 20M\Omega/25VDC$



Detail A

ITO Film 0.188mm  
Adhesive  
ITO Glass 2.8mm

TOP VIEW

瞄準科技有限公司 AIM TOUCH TECHNOLOGY CO.,LTD.	DATE : 2017/03/02	Part Number	ITO Film Type	Glass Type	Glass Thickness	Finished Part Thickness
	MODEL :					
 WWW.AIMTOUCH.COM	<b>FLAT TOUCH WINDOW</b>	AIM-5R-2150-M13-G3N-TW	ANTI GLARE	high temperature strengthen	2.8mm	3.2mm±0.2

NOTE : All indications are the millimeters.